



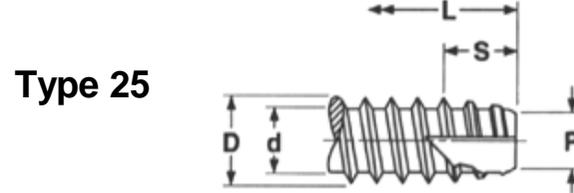

TRANSHOW SCREW FACTORY

GAOYANG RD, ZHOUEHAN VILLAGE, JIANGSHAN TOWN
 YINZHOU DISTRICT, NINGBO CITY, 315100 CHINA
 Tel: +86-574-8736.7873 Fax: +86-574-8736.4349
www.transhow.net Email: transhow@transhow.net

Self Tapping Screw Thread Types

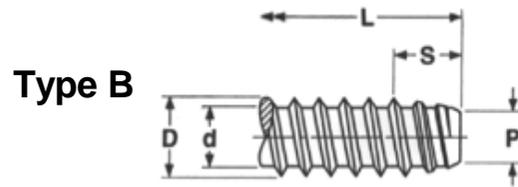

Nominal Size or Basic Screw Diameter	Thread per Inch	D		d		P		S				L				
		Major Diameter		Minor Diameter		Point Diameter		Point Taper Length				Determinant Length for Point Taper		Minimum Practical Screw Length		
		Max.	Min.	Max.	Min.	Max.	Min.	For Short Screws		For Long Screws		90 Heads	Csk Heads	90 Heads	Csk Heads	
2	0.0860	32	0.088	0.084	0.064	0.060	0.058	0.054	0.062	0.047	0.078	0.062	7/64	3/16"	7/64	5/32
4	0.1120	24	0.114	0.110	0.086	0.082	0.079	0.074	0.083	0.063	0.104	0.083	3/16"	1/4"	9/64	3/16"
6	0.1380	20	0.139	0.135	0.104	0.099	0.095	0.089	0.100	0.075	0.125	0.100	1/4"	5/16"	11/64	1/4"
8	0.1640	18	0.166	0.161	0.122	0.116	0.112	0.106	0.111	0.083	0.139	0.111	5/16"	7/16"	3/16"	1/4"
10	0.1900	16	0.189	0.183	0.141	0.135	0.130	0.123	0.125	0.094	0.156	0.125	3/8"	1/2"	15/64	5/16"
12	0.2160	14	0.215	0.209	0.164	0.157	0.152	0.145	0.143	0.107	0.179	0.143	7/16"	9/16"	9/32	3/8"
14	0.2500	14	0.246	0.240	0.192	0.185	0.179	0.171	0.143	0.107	0.179	0.143	1/2"	5/8"	9/32	3/8"
5/16"	0.3125	12	0.315	0.306	0.244	0.236	0.230	0.222	0.167	0.125	0.196	0.161	15/32	19/32	27/32	31/32
3/8"	0.3750	12	0.380	0.371	0.309	0.299	0.293	0.285	0.167	0.125	0.196	0.161	17/32	11/16"	15/16	1 1/8